LULEÅ/Kallax

ILS or LOC RWY 32

INSTRUMENT APPROACH CHART – ICAO

THR ELEV 21.0 ft, AD ELEV 65 ft
OCH are related to THR.
Circling OCH are related to AD ELEV.
BRG are MAG
ALT. HGT and ELEV in ft.

KALLAX TOWER	128.205
KALLAX APPROACH	125.455

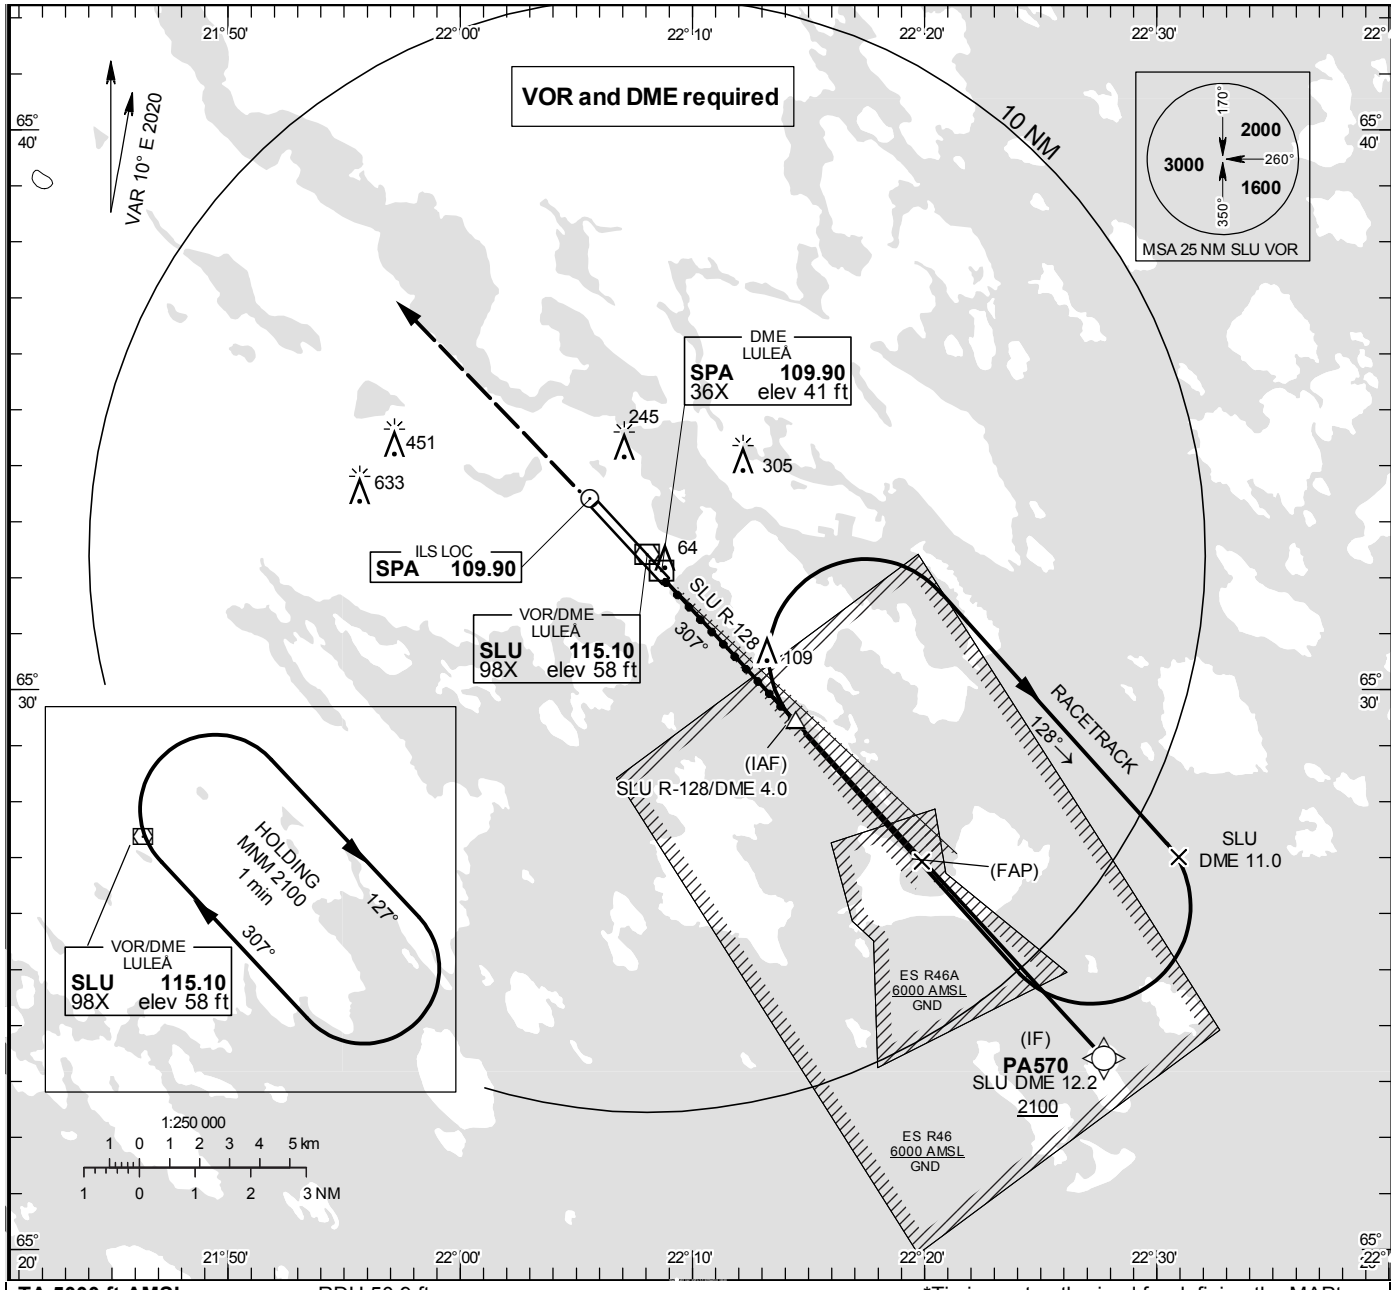

TA 5000 ft AMSL RDH 50.9 ft *Timing not authorized for defining the MAPt

LOC
FAF SPA DME 6.8 at 2100
MAPt at SPA DME 0.7
Descent grad. 5.0% (2.9°)

OM replaced by SPA DME 4.0
MM replaced by SPA DME 0.7

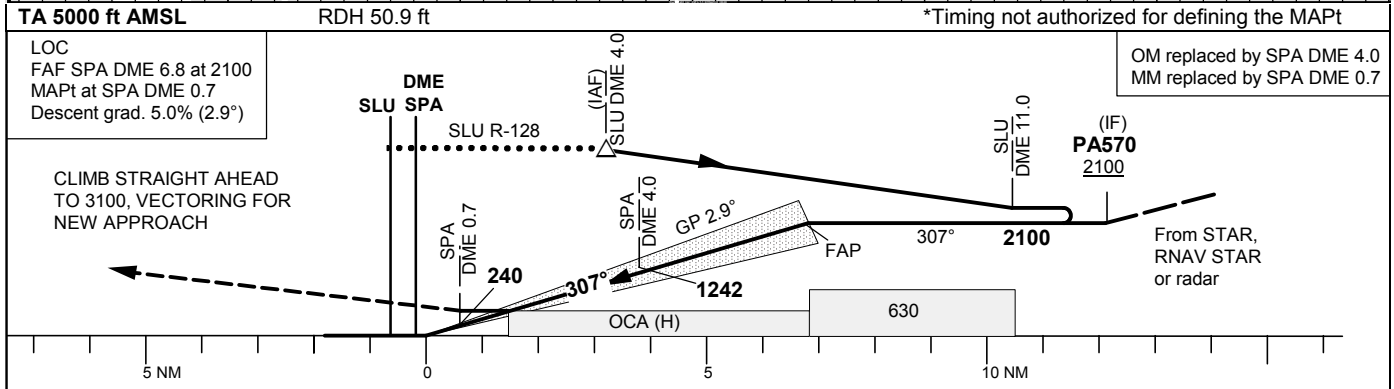

OCA (H)						Final approach	LOC Distance FAF-MAPt 6.1 NM*					
Cat of ACFT		A	B	C	D	DME SPA NM	2	3	4	5	6	
Straight-in Approach	CAT I	163 (142)	172 (151)	183 (162)	195 (174)	ALT	630	940	1240	1550	1850	
	LOC	360 (340)				GS	kt	80	100	120	140	160	180
Circling		550 (490)	610 (550)	850 (790)	1030 (970)	Time	min:s	4:36	3:40	3:04	2:37	2:18	2:02
						Rate of descent	ft/min	405	505	605	710	810	910

CHANGE: Frequency